

Aggregates

MODULAR SAMPLE SPLITTERS



Your reliable partner for testing

Models:

- RT-MAg-001/M1** – Stand for Splitters with slot width 6.5 mm and 12.5 mm including set of 3 receiving pans
RT-MAg-001/M2 – Stand for Splitters with slot width from 25 mm to 75 mm including set of 3 receiving pans

Accessories:

- RT-MAg-001/zM6** – Sample Splitter with 6.5 mm slot width for RT-MAg-001/M1
RT-MAg-001/zM12 – Sample Splitter with 12.5 mm slot width for RT-MAg-001/M1
RT-MAg-001/zM25 – Sample Splitter with 25 mm slot width for RT-MAg-001/M2
RT-MAg-001/zM37 – Sample Splitter with 37.5 mm slot width for RT-MAg-001/M2
RT-MAg-001/zM50 – Sample Splitter with 50 mm slot width for RT-MAg-001/M2
RT-MAg-001/zM75 – Sample Splitter with 75 mm slot width for RT-MAg-001/M2
RT-MAg-001/zM1 – Receiving Pan with handles for RT-MAg-001/M1
RT-MAg-001/zM2 – Receiving Pan with handles for RT-MAg-001/M2


Standards:

EN 932-1, EN 932-2, ASTM C702

Description:

The sample splitters are ideal for the reduction of granular sample material. They are easy to use, easy to clean and modular. On stand can fit up to 4 different splitters with slot width from 6.5 mm to 75 mm.

The stand RT-MAg-001/M supplied complete with three receiving pans with handles. The stand made of metal with polymeric powder coating, the splitter and receiving pans made of stainless steel which allows heating and working with hot materials such as asphalt mix.

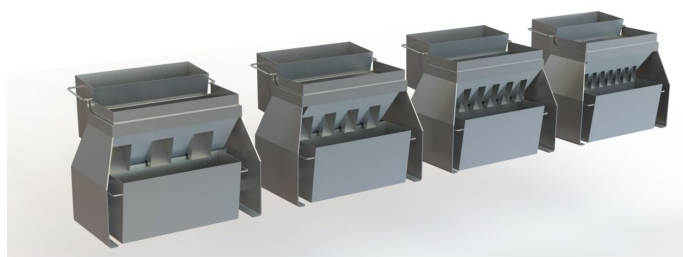

Technical specifications:

	RT-MAg-001/M1		RT-MAg-001/M2			
	RT-MAg-001/zM6	RT-MAg-001/zM12	RT-MAg-001/zM25	RT-MAg-001/zM37	RT-MAg-001/zM50	RT-MAg-001/zM75
Slot width	6.5 mm	12.5 mm	25 mm	37.5 mm	50 mm	75 mm
Number of slots	16	12	16	12	8	6
Weight of the stand (approx.)	4.9 kg		9.3 kg			
Dimensions of the stand (LxWxH)	270x150x250 mm		570x300x442 mm			
Weight of the sample splitter	1.6 kg	1.5 kg	3.6 kg	3.8 kg	3.2 kg	3.0 kg
Weight of the receiving pan (approx.)	1.2 kg		3.0 kg			
Dimensions of the receiving pan (LxWxH)	210x80x120 mm		510x162x216 mm			

